

Telescopic handlers :: MAGNI TH

TH 6.20






Copyright © SAB d.o.o., All Rights Reserved 2016 | e-mail: office@sabdoo.rs, www.sabdoo.rs

Tehnickal specification


Maximum lifting height	19.20m
Maximum load capacity	6.000kg
Maximum reach	14.50m
Width	2.55m
Height	2.73m
Length	6.42m
Ground clearance	0.41m
Gross weight	14.200kg
Rotation	Ne

External turning radius	5.44m
Engine	Deutz TCD 3.6 L4 Stage V
Gradeability	47%
Engine power	100 kW (136 hp)
Maximum torque	500 Nm
Fuel tank capacity	150l
Transmission	2+2 speeds (forward and reverse)
Maximum travel speed	40km/h
Tires	445/65 R22.5

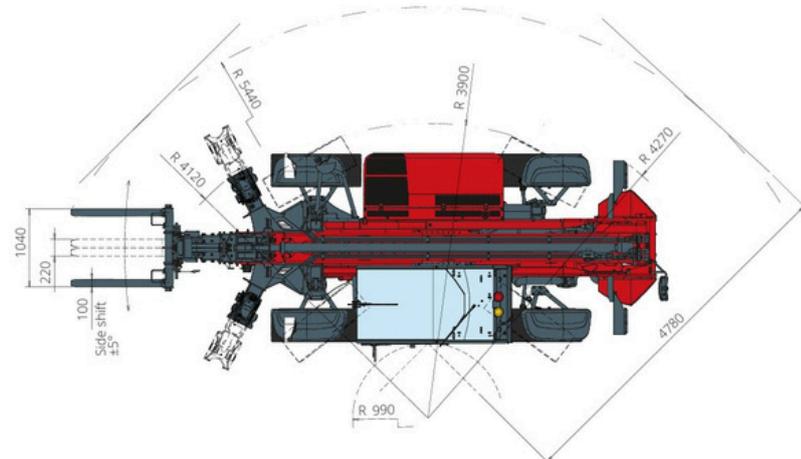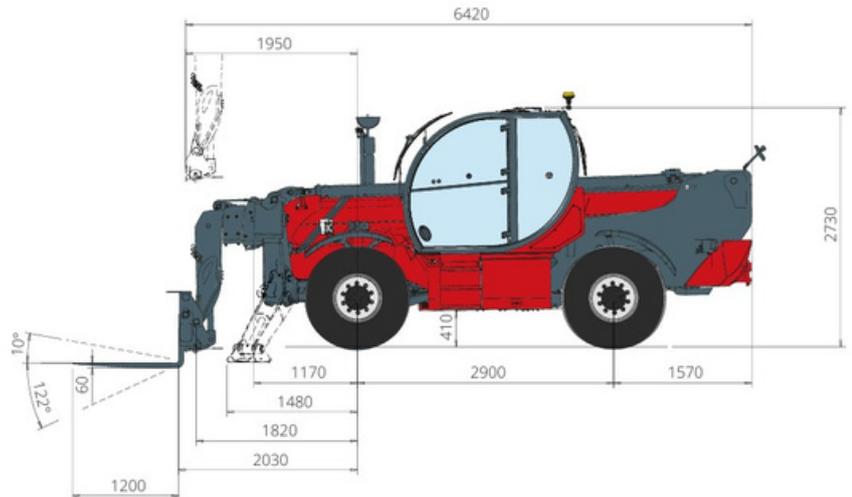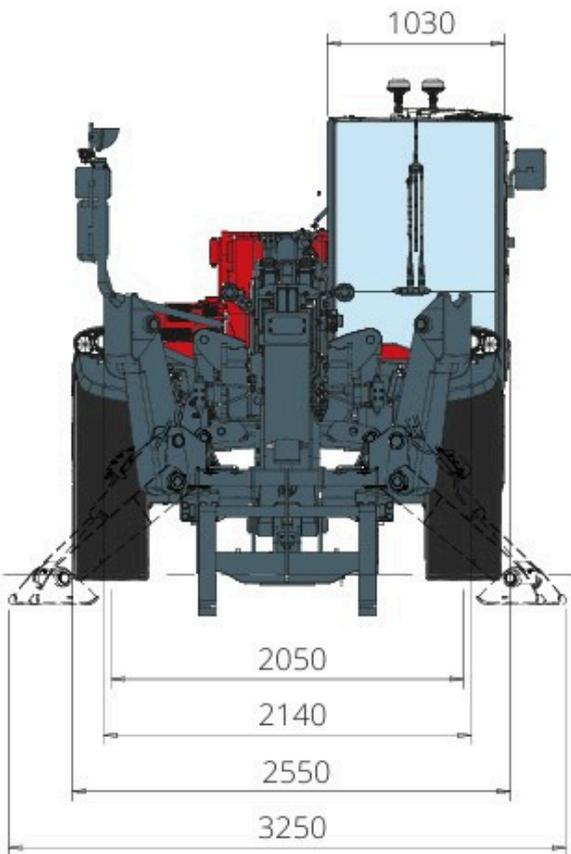


Load chart with FULLY EXTENDED STABILISERS (360°)

ATT-03-012

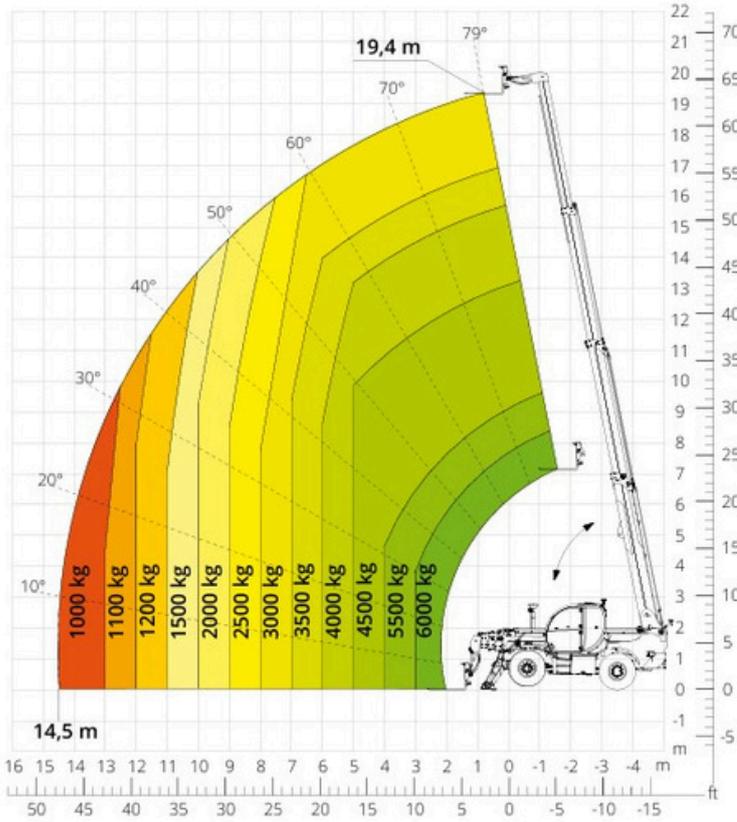

Load chart FRONT ATTACHMENT ON TYRES


ATT-03-012

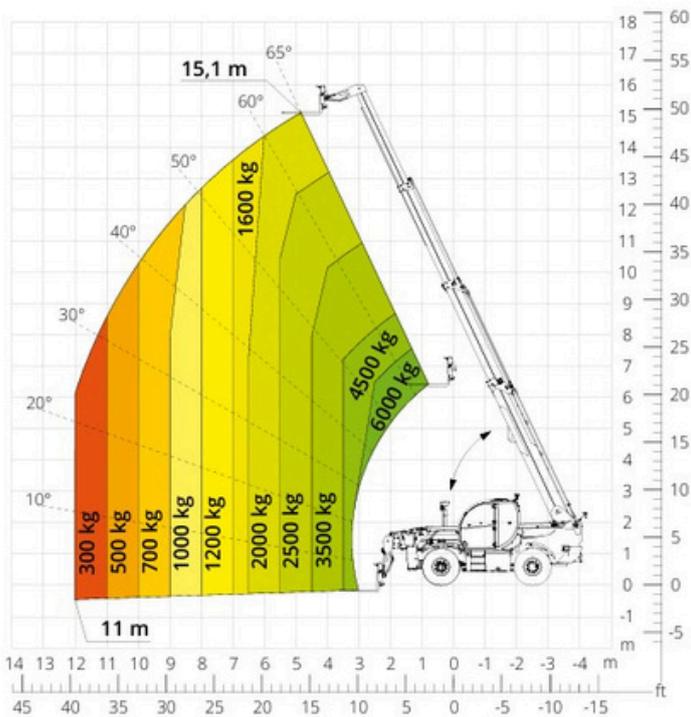

The 6.20 is equipped as standard with the side-shift system. It allows for lateral movement of the rear part of the chassis and the boom, around the longitudinal axis of the machine, correcting the position of the load without moving the unit. This system allows for a $\pm 5^\circ$ shift which corresponds to a ± 1.5 m movement when the boom is fully extended, whatever the attachment fitted.


Load chart with
WINCH, 6,000 kg

ATT-02-004

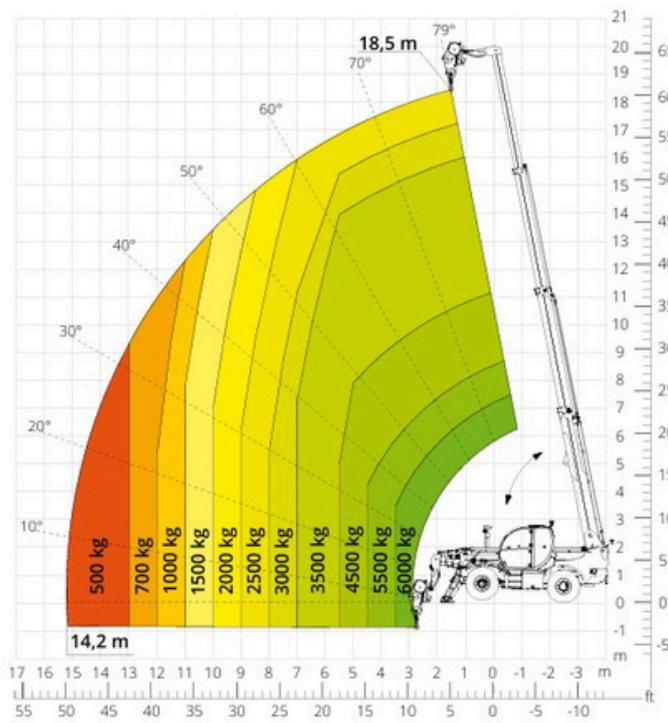

Load chart with
HOOK, 6,000 kg

ATT-05-001

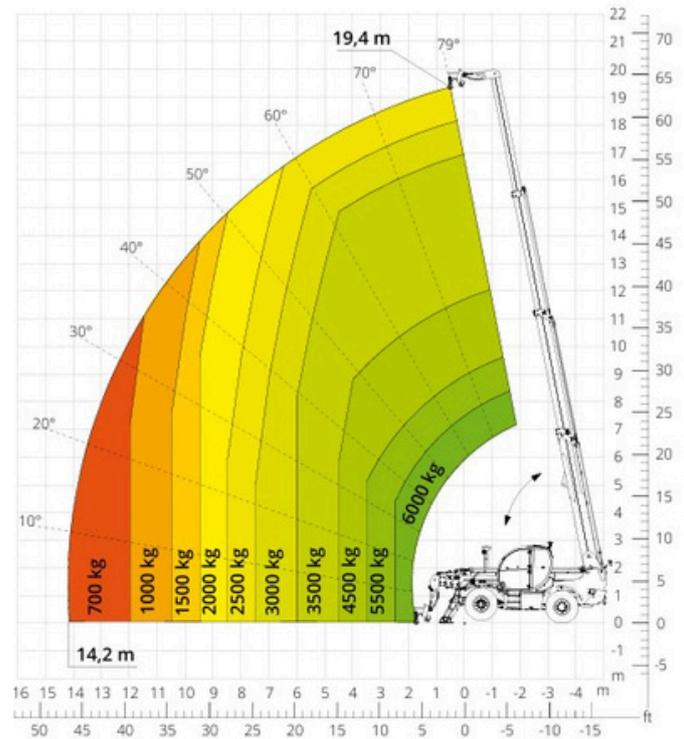

Load chart with
ROTATING EXTENDABLE PLATFORM,
500 kg

ATT-01-007

